



Subminiature D female connector compliant with DIN 41 652 on screw terminals

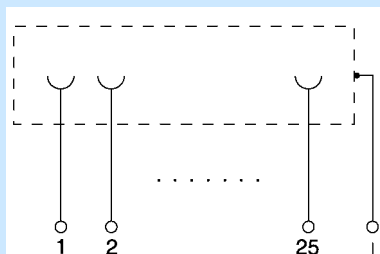


Type	UBE-D-1846	UBE-D-1872
Article no.	711846	711872
Technical Data		
Number of terminations	9	37
Dimensions (W x H x D)	35 mm x 77 mm x 57 mm	100 mm x 77 mm x 57 mm
Weight	0,058 kg/pcs	0,17 kg/pcs
Type	UBE-D-1854	UBE-D-1904
Article no.	711854	711904
Technical Data		
Number of terminations	15	50
Dimensions (W x H x D)	45 mm x 77 mm x 57 mm	140 mm x 77 mm x 57 mm
Weight	0,08 kg/pcs	0,23 kg/pcs
Type	UBE-D-1860	
Article no.	711860	
Technical Data		
Number of terminations	25	
Dimensions (W x H x D)	70 mm x 77 mm x 57 mm	
Weight	0,118 kg/pcs	
General Data		
Rated Voltage	max. AC/DC 125 V	max. AC/DC 125 V
Rated current (at U_N)	max. 1 A	max. 1 A
1st connection type	Sub-D female connector	Sub-D female connector
Model	Varioprint	Varioprint
Connection device	Screw terminals one-wire 4 mm ² fine strand 2.5 mm ²	Screw terminals one-wire 4 mm ² fine strand 2.5 mm ²
Type of protection	IP00	IP00
Mount	Can be snapped onto top hat profile TS35 (EN 50 022)	Can be snapped onto top hat profile TS35 (EN 50 022)
Operating temperature range	-25 °C – 60 °C	-25 °C – 60 °C
CE conformity	yes	yes

Subminiature D pin connector compliant with DIN 41 652 on screw terminals

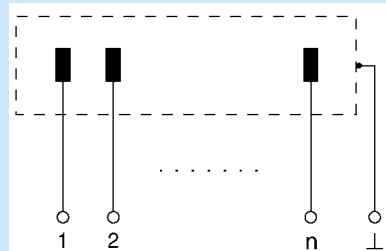


Type	UBE-D-1844	UBE-D-1870
Article no.	711844	711870
Technical Data		
Number of terminations	9	37
Dimensions (W x H x D)	35 mm x 77 mm x 57 mm	100 mm x 77 mm x 57 mm
Weight	0,058 kg/pcs	0,17 kg/pcs
Type	UBE-D-1852	UBE-D-1905
Article no.	711852	711905
Technical Data		
Number of terminations	15	50
Dimensions (W x H x D)	45 mm x 77 mm x 57 mm	140 mm x 77 mm x 57 mm
Weight	0,08 kg/pcs	0,226 kg/pcs
Type	UBE-D-1834	
Article no.	711834	
Technical Data		
Number of terminations	25	
Dimensions (W x H x D)	70 mm x 77 mm x 57 mm	
Weight	0,12 kg/pcs	
General Data		
Rated Voltage	max. AC/DC 125 V	max. AC/DC 125 V
Rated current (at U_N)	max. 1 A	max. 1 A
1st connection type	Sub-D pin connector	Sub-D pin connector
Model	Varioprint	Varioprint
Connection device	Screw terminals one-wire 4 mm ² fine strand 2.5 mm ²	Screw terminals one-wire 4 mm ² fine strand 2.5 mm ²
Type of protection	IP00	IP00
Mount	Can be snapped onto top hat profile TS35 (EN 50 022)	Can be snapped onto top hat profile TS35 (EN 50 022)
Operating temperature range	-25 °C – 60 °C	-25 °C – 60 °C
CE conformity	yes	yes

Flat ribbon pin connector compliant with DIN 41 651 on screw terminals



Type	UBE-FL-1848	UBE-FL-1856
Article no.	711848	711856
Technical Data		
Number of terminations	10	16
Dimensions (W x H x D)	35 mm x 77 mm x 57 mm	45 mm x 77 mm x 57 mm
Weight	0,056 kg/pcs	0,076 kg/pcs
Type	UBE-FL-1850	UBE-FL-1862
Article no.	711850	711862
Technical Data		
Number of terminations	14	26
Dimensions (W x H x D)	40 mm x 77 mm x 57 mm	70 mm x 77 mm x 57 mm
Weight	0,072 kg/pcs	0,11 kg/pcs
Type	UBE-FL-1830	UBE-FL-1868
Article no.	711830	711868
Technical Data		
Number of terminations	20	34
Dimensions (W x H x D)	55 mm x 77 mm x 57 mm	90 mm x 77 mm x 57 mm
Weight	0,09 kg/pcs	0,148 kg/pcs
General Data		
Rated Voltage	max. AC/DC 125 V	max. AC/DC 125 V
Rated current (at U_N)	max. 1 A	max. 1 A
1st connection type	Flat ribbon pin connector	Flat ribbon pin connector
Model	Varioprint	Varioprint
Connection device	Screw terminals one-wire 4 mm ² one-wire 2.5 mm ²	Screw terminals one-wire 4 mm ² one-wire 2.5 mm ²
Type of protection	IP00	IP00
Mount	Can be snapped onto top hat profile TS35 (EN 50 022)	Can be snapped onto top hat profile TS35 (EN 50 022)
Operating temperature range	-25 °C – 60 °C	-25 °C – 60 °C
CE conformity	yes	yes

Flat ribbon pin connector compliant with DIN 41 651 on screw terminals



Type	UBE-FL-1832	UBE-FL-1883
Article no.	711832	711883
Technical Data		
Number of terminations	40	60
Dimensions (W x H x D)	110 mm x 77 mm x 57 mm	154 mm x 77 mm x 57 mm
Weight	0,172 kg/pcs	0,252 kg/pcs
Type	UBE-FL-1877	UBE-FL-1885
Article no.	711877	711885
Technical Data		
Number of terminations	50	64
Dimensions (W x H x D)	130 mm x 77 mm x 57 mm	175 mm x 77 mm x 57 mm
Weight	0,208 kg/pcs	0,262 kg/pcs
General Data		
Rated Voltage	max. AC 125 V	max. AC/DC 125 V
Rated current (at U _N)	max. 1 A	max. 1 A
1st connection type	Flat ribbon pin connector	Flat ribbon pin connector
Model	Varioprint	Varioprint
Connection device	Screw terminals one-wire 4 mm ² one-wire 2.5 mm ²	Screw terminals one-wire 4 mm ² one-wire 2.5 mm ²
Type of protection	IP00	IP00
Mount	Can be snapped onto top hat profile TS35 (EN 50 022)	Can be snapped onto top hat profile TS35 (EN 50 022)
Operating temperature range	-25 °C – 60 °C	-25 °C – 60 °C
CE conformity	yes	yes